


Features

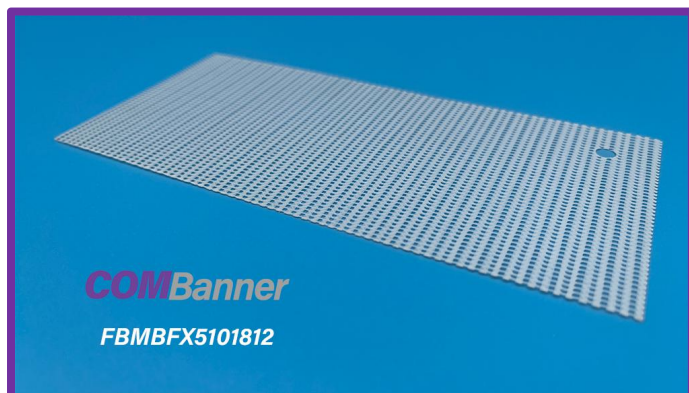

Transmittance Rate 35.8%; Airflow Through Rate 3979mm/s
PVC coated high tenacity polyester scrim 500D*1000D 18*12
PVC Liner 100gsm included is also available which prevents ink spray through when printing
Offer enhanced image compared to traditional meshes

Technical Data Sheet

Item Code		FBMBFX5101812W	Test Method
Base Fabric		500D*1000D 18*12	DIN EN ISO2060
Total Weight (GSM)		450	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1100	ISO527/3:1995
	Weft (N/5cm)	1200	ISO527/3:1995
Tear Strength	Warp (N/5cm)	210	ISO4674/1:2003
	Weft (N/5cm)	220	ISO4674/1:2003
Transmittance Rate		35.8%	
Airflow Through Rate		3979mm/s	
Temperature		-30°C/+70°C	ISO13934-1:1999
Flame Retardant		B1/M1/M2/NFPA701	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.

Ink Printability

SOLVENT	ECO-SOLVENT	UV	LATEX	SCREEN PRINTING
■	■	■	■	■



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat: +86-15858322153
Email: contact@hncomax.com jeff@hncomax.com

